

ON CALCULATING TRANSIENT ELECTROMAGNETIC FIELDS  
OF A SMALL CURRENT-CARRYING LOOP OVER A  
HOMOGENEOUS EARTH

James R. Wait and Randolph H. Ott  
Institute for Telecommunication Sciences  
Office of Telecommunications  
U. S. Department of Commerce  
Boulder, Colorado 80302

Contract No. PRO-Y-71-872

Project No. 5635  
Task No. 563506  
Work Unit No. 56350601


Scientific Report No. 53  
July 14, 1971

This document has been approved for public release and sale;  
its distribution is unlimited.

Contract Monitor: Philipp Blacksmith  
Microwave Physics Laboratory

Prepared for  
AIR FORCE CAMBRIDGE RESEARCH LABORATORIES  
AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE  
BEDFORD, MASSACHUSETTS 01730

Reproduced by  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
Springfield, Va. 22151

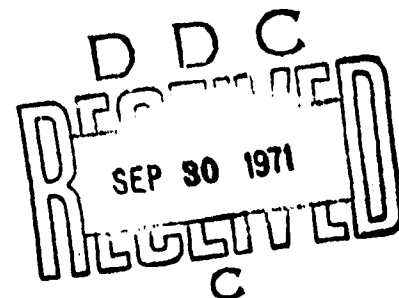

AD 730339

AMENDMENT NO.	
OPSTE	WHITE SECTION <input checked="" type="checkbox"/>
DOC	DIFF SECTION <input type="checkbox"/>
EXAMINED	<input type="checkbox"/>
JUSTIFICATION.....	
BY .....	
DISTRIBUTION/AVAILABILITY CODES	
DIST.	AVAIL. OR/OF SPECIAL
A	

Qualified requestors may obtain additional copies from the Defense Documentation Center. All others should apply to the National Technical Information Service.

AFCRL-71-0386

910-9101466

ON CALCULATING TRANSIENT ELECTROMAGNETIC FIELDS  
OF A SMALL CURRENT-CARRYING LOOP OVER A  
HOMOGENEOUS EARTH

James R. Wait and Randolph H. Ott  
Institute for Telecommunication Sciences  
Office of Telecommunications  
U. S. Department of Commerce  
Boulder, Colorado 80302

Contract No. PRO-Y-71-872

Project No. 5635  
Task No. 563506  
Work Unit No. 56350601

Scientific Report No. 53  
July 14, 1971

This document has been approved for public release and sale;  
its distribution is unlimited.

Contract Monitor: Philipp Blacksmith  
Microwave Physics Laboratory

Prepared for  
AIR FORCE CAMBRIDGE RESEARCH LABORATORIES  
AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE  
BEDFORD, MASSACHUSETTS 01730

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) Institute for Telecommunication Sciences, Office of Telecommunications, U. S. Department of Commerce, Boulder, Colorado 80302		2a. REPORT SECURITY CLASSIFICATION Unclassified 2b. GROUP
3. REPORT TITLE ON CALCULATING TRANSIENT ELECTROMAGNETIC FIELDS OF A SMALL CURRENT-CARRYING LOOP OVER A HOMOGENEOUS EARTH.		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific. Interim.		
5. AUTHOR(S) (Last name, first name, initial) James R. Wait Randolph H. Ott		
6. REPORT DATE July 14, 1971	7a. TOTAL NO. OF PAGES 11	7b. NO. OF REFS 4
8a. CONTRACT OR GRANT NO. PRO-Y-71-872 b. PROJECT NO. Task, Work Unit Nos. 5635-06-01 c. <del>XXX</del> DoD Element 61102F d. DoD Sub-Element 681305		9a. ORIGINATOR'S REPORT NUMBER(S) Scientific Report No. 53 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) AFCRL-71-0386
10. AVAILABILITY/LIMITATION NOTICES 1 - This document has been approved for public release and sale; its distribution is unlimited.		
11. SUPPLEMENTARY NOTES TECH, OTHER		12. SPONSORING MILITARY ACTIVITY Air Force Cambridge Research Laboratories (LZ), L. G. Hanscom Field Bedford, Massachusetts 01730
13. ABSTRACT <p>The basic theory of airborne EM surveying, in the time domain, is considered. Rather than resorting to tedious <u>double</u> numerical integration, a more direct approach is adopted. This method, valid in the quasi-static regime, is illustrated for a homogeneous flat earth. The results exhibit a number of clear-cut features that are relevant to remote sensing. For example, a vertical co-axial loop system has a desirable transient response from the standpoint of yielding conductivity data without requiring accurate information on the height of the device above the ground.</p>		

DD FORM 1473  
1 JAN 64

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
quasi-static regime						
remote sensing						
homogeneous earth						
transient response						
magnetic dipole						
pulse response						
geophysical probing						

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

UNCLASSIFIED

Security Classification

FORM 1 - 58

## ABSTRACT

The basic theory of airborne EM surveying, in the time domain, is considered. Rather than resorting to tedious double numerical integration, a more direct approach is adopted. This method, valid in the quasi-static regime, is illustrated for a homogeneous flat earth. The results exhibit a number of clear-cut features that are relevant to remote sensing. For example, a vertical co-axial loop system has a desirable transient response from the standpoint of yielding conductivity data without requiring accurate information on the height of the device above the ground.

# ON CALCULATING TRANSIENT ELECTROMAGNETIC FIELDS OF A SMALL CURRENT-CARRYING LOOP OVER A HOMOGENEOUS EARTH

James R. Wait and Randolph H. Ott

## ABSTRACT

The basic theory of airborne EM surveying, in the time domain, is considered. Rather than resorting to tedious double numerical integration, a more direct approach is adopted. This method, valid in the quasi-static regime, is illustrated for a homogeneous flat earth. The results exhibit a number of clear-cut features that are relevant to remote sensing. For example, a vertical co-axial loop system has a desirable transient response from the standpoint of yielding conductivity data without requiring accurate information on the height of the device above the ground.

## 1. INTRODUCTION

Remote sensing of the earth's surface layers often utilizes the eddy currents induced by an active electromagnetic source such as a magnetic dipole in an aircraft. The secondary fields are detected either at the aircraft or in a towed bird. While the main objective in commercial surveys is to locate metallic mineralization, the secondary field response is a measure of the effective ground conductivity of the overburden. This in turn can often be related to the rock strength. Currently, there is a great interest in utilizing transient source signals rather than the more prosaic time harmonic fields.

In this note, we wish to present the basic theory for the time domain response of a magnetic dipole or small loop located over an idealized flat homogeneous earth. The results are basic to a proper understanding of airborne electromagnetic geophysical surveys.

## 2. FORMULATION

Our model is very simple; we imagine the source to be a small loop (or vertical magnetic dipole) of area  $dA$  located at height  $h$  over a non-magnetic conducting half-space of conductivity  $\sigma$ . We choose a cylindrical coordinate system  $(\rho, \phi, z)$  with the dipole at  $z = h$  and the earth's surface at  $z = 0$ . We assume for sake of simplicity that all displacement currents may be neglected. This is justified by the fact that all linear dimensions of the problem are extremely small compared with the significant free space wavelengths in the problem.

The time harmonic solution for a current  $I \exp(i\omega t)$  in the loop is well-known. The resulting magnetic field components at P are

$$H_{\rho}(i\omega) = \frac{\partial^2 \Pi(i\omega)}{\partial \rho \partial z} \quad (1)$$

and

$$H_z(i\omega) = \frac{\partial^2 \Pi(i\omega)}{\partial z^2} \quad (2)$$

where  $\Pi(i\omega)$  is the Hertz potential given by

$$\begin{aligned} \Pi(i\omega) = & \frac{I(i\omega) dA}{4\pi} \left[ \frac{1}{r_o} - \frac{1}{r} \right] \\ & + \frac{I(i\omega) dA}{4\pi} \int_0^\infty \frac{2\lambda e^{-\lambda(h+z)}}{(\lambda^2 + \sigma \mu i\omega)^{\frac{1}{2}} + \lambda} J_0(\lambda \rho) d\lambda \end{aligned} \quad (3)$$

where  $r_o = [\rho^2 + (z-h)^2]^{\frac{1}{2}}$ ,  $r = [\rho^2 + (z+h)^2]^{\frac{1}{2}}$ ,  $\mu = 4\pi \times 10^{-7}$  and  $J_0$  is a Bessel function. If now the current in the loop is  $I_o \delta(t)$ , where  $\delta(t)$  is the unit impulse function, we find without difficulty that the transient field components are to be obtained from

$$h_{\rho}(t) = \partial^2 \Pi(t) / \partial \rho \partial z \quad (4)$$

$$h_z(t) = \partial^2 \Pi(t) / \partial z^2 \quad (5)$$

where

$$\Pi(t) = \frac{I_o dA}{4\pi} \left[ \frac{1}{r_o} - \frac{1}{r} \right] \delta(t) + \Delta \Pi(t) \quad (6)$$

and

$$\Delta \Pi(t) = \frac{I_o dA}{4\pi} \int_0^\infty \left[ \mathcal{L}^{-1} \frac{2\lambda}{(\lambda^2 + \sigma \mu s)^{\frac{1}{2}} + \lambda} \right] e^{-\lambda(h+z)} J_0(\lambda \rho) d\lambda \quad (7)$$

where  $\mathcal{L}^{-1}$  denotes the inverse Laplace transform operator.

### 3. THE TRANSIENT SOLUTION

Using Pair No. 543.5 in Campbell and Foster's [1949] tables, we find that (7) is equivalent to

$$\Delta \Pi(t) = \frac{I_o dA}{4\pi} \frac{2}{\sqrt{\pi}} \frac{1}{t} \int_0^{\infty} F\left(\frac{\lambda^2 t}{\sigma \mu}\right) J_0(\lambda \rho) e^{-\lambda(h+z)} d\lambda \quad (8)$$

where

$$F(T) = T^{\frac{1}{2}} e^{-T} \left[ 1 - (\pi T)^{\frac{1}{2}} e^T \operatorname{erfc}(T^{\frac{1}{2}}) \right] \quad (9)$$

and where  $\operatorname{erfc}$  is the complement of the error function. By changing the variable of integration in (8) to  $x = [t/(\sigma \mu)]^{\frac{1}{2}} \lambda$ , we can write

$$\Delta \Pi(t) = \frac{I_o dA}{4\pi} \frac{2}{\sqrt{\pi}} \frac{1}{t} \left(\frac{\sigma \mu}{t}\right)^{\frac{1}{2}} \int_0^{\infty} \left[ x e^{-x^2} - \pi^{\frac{1}{2}} x^2 \operatorname{erfc}(x) \right] e^{-Hx} J_0(Px) dx \quad (10)$$

where  $H = (\sigma \mu / t)^{\frac{1}{2}} (h+z)$  and  $P = (\sigma \mu / t)^{\frac{1}{2}} \rho$ . In order to deal effectively with the integral in (10), we write

$$e^{-Hx} J_0(Px) = \sum_{m=0}^{\infty} a_m \frac{(-1)^m}{m!} x^m \quad (11)$$

where  $a_m = (-1)^m \left( \frac{d^m}{dx^m} \right) \left[ e^{-Hx} J_0(Px) \right] \Big|_{x=0}$ . In the special case where

$P = 0$  (i. e.,  $\rho = 0$ ), we see that  $a_m = H^m$ .

Using (11), we find that (10) becomes

$$\Delta \Pi(t) = \frac{I_o dA}{4\pi} \frac{2}{\sqrt{\pi}} \frac{1}{t} \left(\frac{\sigma \mu}{t}\right)^{\frac{1}{2}} \sum_{m=0}^{\infty} \frac{(-1)^m a_m}{m!} \left\{ \int_0^{\infty} x^{m+1} e^{-x^2} dx - \sqrt{\pi} \int_0^{\infty} x^{m+2} \operatorname{erfc}(x) dx \right\} \quad (12)$$

Now it follows from the basic definition of the Gamma function  $\Gamma(n)$  of argument  $n$  that

$$\int_0^{\infty} x^{2n-1} e^{-x^2} dx = \Gamma(n)/2 \quad (13)$$

which has the form of the first integral in (12). Also, from Gradshteyn and Ryzhik [1965], (No. 6281, pg. 648), we have

$$\int_0^{\infty} x^{2q-1} \operatorname{erfc}(x) dx = \frac{\Gamma(q + \frac{1}{2})}{2q\pi^{\frac{1}{2}}} \quad (14)$$

which is the form of the second integral in (12). Thus

$$\Delta \Pi(t) = \frac{I_0 dA}{4\pi} \frac{1}{t} \left( \frac{\sigma\mu}{\pi t} \right)^{\frac{1}{2}} \sum_{m=0}^{\infty} \frac{(-1)^m a^m}{m!} \frac{\Gamma(\frac{m}{2} + 1)}{m+3} \quad (15)$$

In order to obtain explicit series representations for the field components, we need to differentiate (15) according to (4) and (5). Of special interest is the response  $h_z(t)$  in the case  $\rho = 0$ . Then we find without difficulty that

$$h_z(t) = \frac{I_0 dA}{4\pi} \frac{\partial^2}{\partial z^2} \left( \frac{1}{r_0} - \frac{1}{r} \right) + \Delta h_z(t) \quad (16)$$

where

$$\begin{aligned} \Delta h_z(t) &= \frac{\partial^2}{\partial z^2} \Delta \Pi(t) \\ &= \frac{I_0 dA}{4\pi} \frac{1}{\sqrt{\pi}} \frac{1}{t} \left( \frac{\sigma\mu}{t} \right)^{\frac{3}{2}} \sum_{m=2}^{\infty} \frac{(-1)^m m(m-1) H^{m-2} \Gamma(\frac{m}{2} + 1)}{m! (m+3)} \end{aligned} \quad (17)$$

where  $H = (\sigma\mu/t)^{\frac{1}{2}} (h+z)$ . From (17), it is evident that for large values of  $t$

$$\Delta h_z(t) = \frac{I_0 dA}{10\pi^{3/2}} \frac{1}{t} \left( \frac{\sigma\mu}{t} \right)^{3/2} \quad (18)$$

which indicates that the magnetic field response varies as  $t^{-5/2}$  for sufficiently large times. This result is in agreement with a similar recent analysis of the problem by Ott [1971], but it disagrees with the analysis by Keller, et al [1970], who made unjustified approximations in the integrand of the time-harmonic

integral representation. It is remarkable that (18) does not depend explicitly on the distance between source and observer. This, of course, would not be the case in general. Nevertheless, it suggests that for a vertical co-axial loop system, the transient coupling should be relatively insensitive to height of the device above the ground.

The behavior of the transient response at small times  $t$  can be obtained directly from (8) and (9). For example, if  $t$  is sufficiently small  $F(T) \approx T^{\frac{1}{2}}$  and then

$$\begin{aligned} \Delta \Pi(t) &\approx \frac{I_0 dA}{4\pi} \cdot \frac{2}{\sqrt{\pi}} \cdot \frac{1}{t} \left( \frac{t}{\sigma\mu} \right)^{\frac{1}{2}} \int_0^\infty \lambda J_0(\lambda\rho) e^{-\lambda(h+z)} d\lambda \\ &\approx \frac{I_0 dA}{2\pi} \left( \frac{1}{\pi\sigma\mu t} \right)^{\frac{1}{2}} \frac{\partial}{\partial z} \frac{1}{r} \end{aligned} \quad (19)$$

This shows that  $\Delta \Pi(t)$  and the field components  $h_\rho(t)$  and  $h_z(t)$  vary as  $t^{-\frac{1}{2}}$  for sufficiently small times.

In the general case where time  $t$  is neither small nor large, it appears necessary to evaluate numerically the integral of the type given by (10). Some examples from this approach are given in Figure 1 where we plot  $h_z(t)$  and  $h_\rho(t)$  normalized to  $4\pi\sigma\mu\rho^5/I_0 dA$  as a function of the time parameter  $T = t/\sigma\mu\rho^2$  for various values of the ratio,  $R = (h+z)/\rho$ . The ordinates are labelled  $H_z(T)$  and  $H_\rho(T)$  to denote the normalization.

The small time and the large time asymptotes are also shown on the curves. These are discussed in the next section.

#### 4. DISCUSSION OF RESULTS AND CONCLUDING REMARKS

The first two leading terms in the large time response are found to be

$$H_z(T) \sim \frac{i}{5\sqrt{\pi}T^{5/2}} \left( 1 - \frac{5\sqrt{\pi}R}{8\sqrt{T}} \right) + O\left( \frac{1}{T^{7/2}} \right), \quad t \sim +\infty \quad (20)$$

This result is compared with the numerical results in Figure 1 for a height to separation ratio,  $R$ , of  $1/2$ . The results of (20) and the numerically computed results show very good agreement for large times.

From (8) and (9), the small time response, for  $t \rightarrow 0$  is given by

$$H_z(T) \sim \frac{6R}{\sqrt{\pi T}} \frac{(2R^2 - 3)}{(1 + R^2)^{7/2}} \quad (21)$$

This small time response is compared with the numerical results in Figure 1 for  $R = 1/2$ . Again, good agreement between the methods is obtained. An interesting feature of the small time response in (21) may be noted by varying  $R$  for fixed  $T$ . As we vary  $R$ , there should be a minimum in the small time response at  $R = \sqrt{3}/\sqrt{2}$ . Indeed, as we vary  $R$  in Figure 1, we find that increasing  $R$  to  $3/2$  increases the response, and decreasing  $R$  to 1 also increases the response.

As indicated in Figure 1, we find that the numerical results for  $h_z(t)$  show a reversal in polarity, while those for  $h_p(t)$  do not. This change in polarity does not occur for  $h_z(t)$  for values of  $R$  greater than about 1.30. Obviously, from Figure 1, the small and large time responses are not sufficient to completely describe the response at intermediate times. This points up the necessity of dealing with the full integral representation of the problem if a proper understanding of the transient phenomena is to be achieved.

## 5. REFERENCES

- Campbell, G. and R. M. Foster (1949), Fourier Integrals for Practical Applications, Van Nostrand Co., New York.
- Gradshteyn, I. S. and I. M. Ryzhik (1965), Table of Integrals, Series, and Products, 4th ed., Academic Press, New York.
- Keller, G. V., A. B. Lebel, and E. L. Ausman, Jr. (1970), AFCRL Final Report, Colo. School of Mines, Golden, Colo.
- Ott, R. H. (June 1971), Private communications.

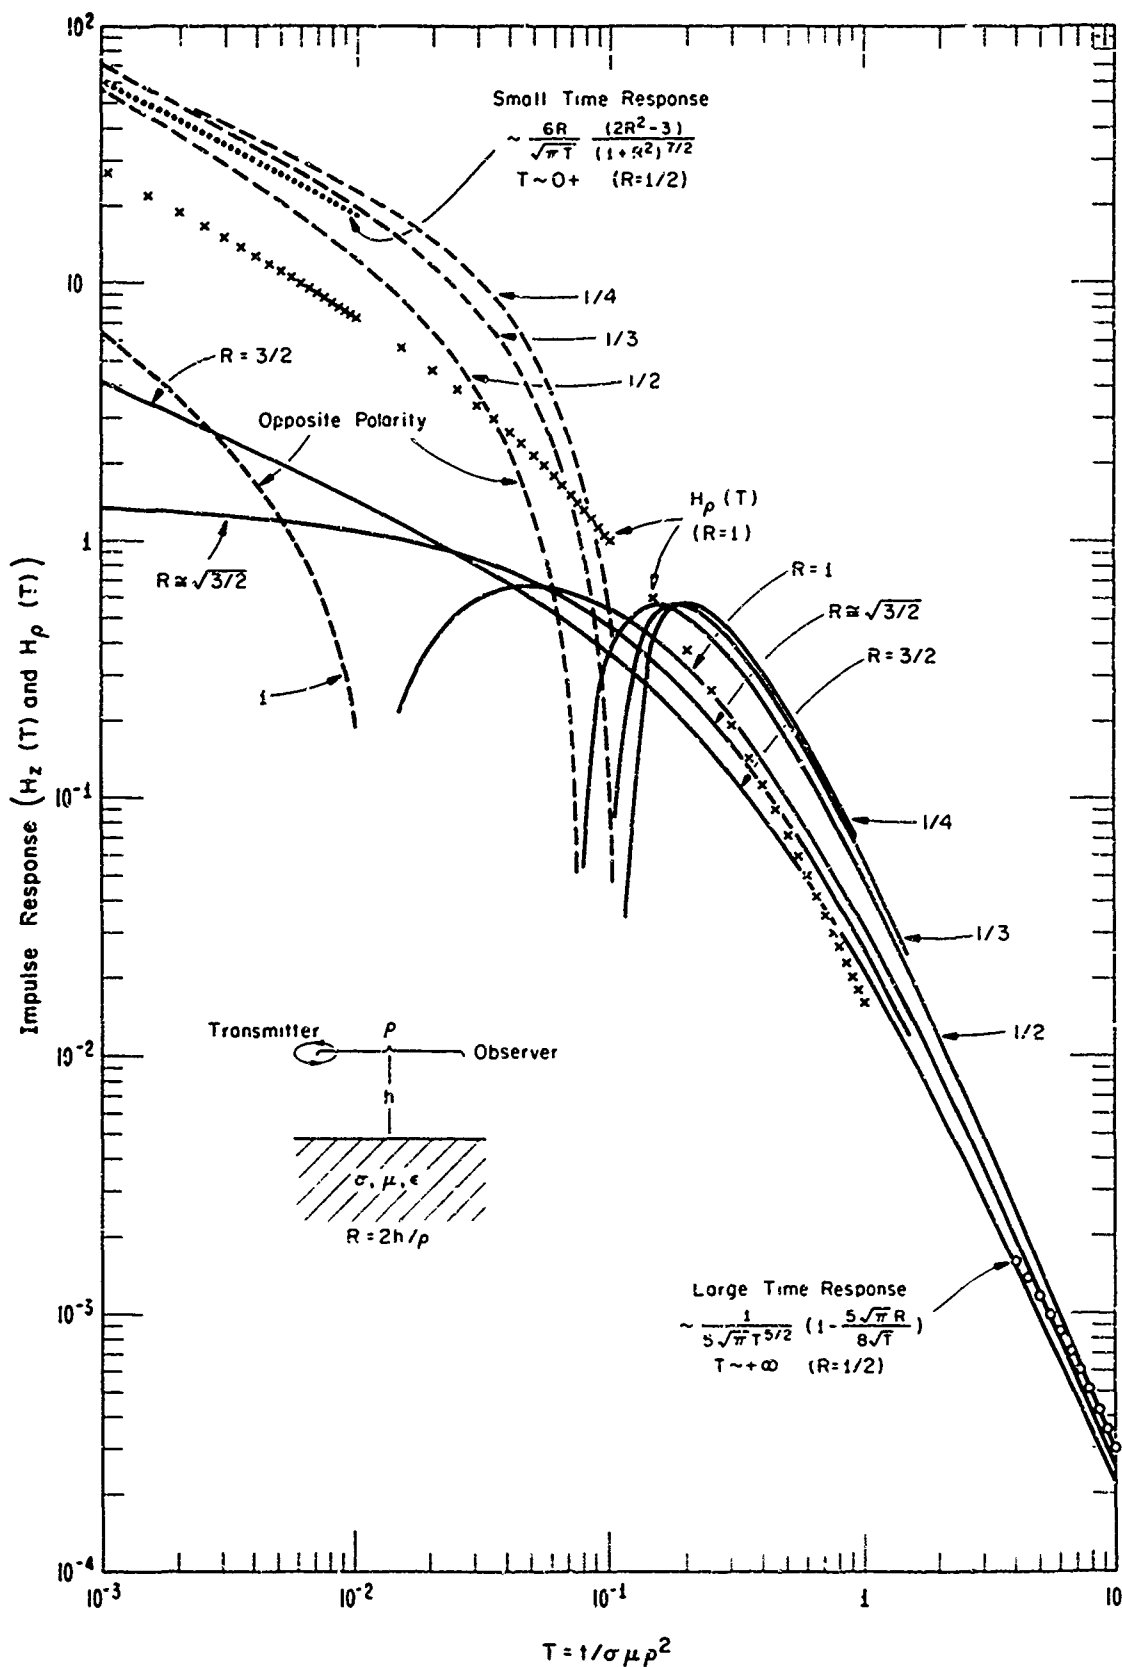


Fig. 1 Impulse field responses  $H_z(T)$  as a function of normalized time for various  $R$  values.  $H_\rho(T)$  is shown for  $R=1$  only.